



Bobcat


One Tough Animal

SPECIFICATIONS

DIESEL FORKLIFTS

NXS-Series, 2.5 to 3.5-ton capacity

🌐 EMEA

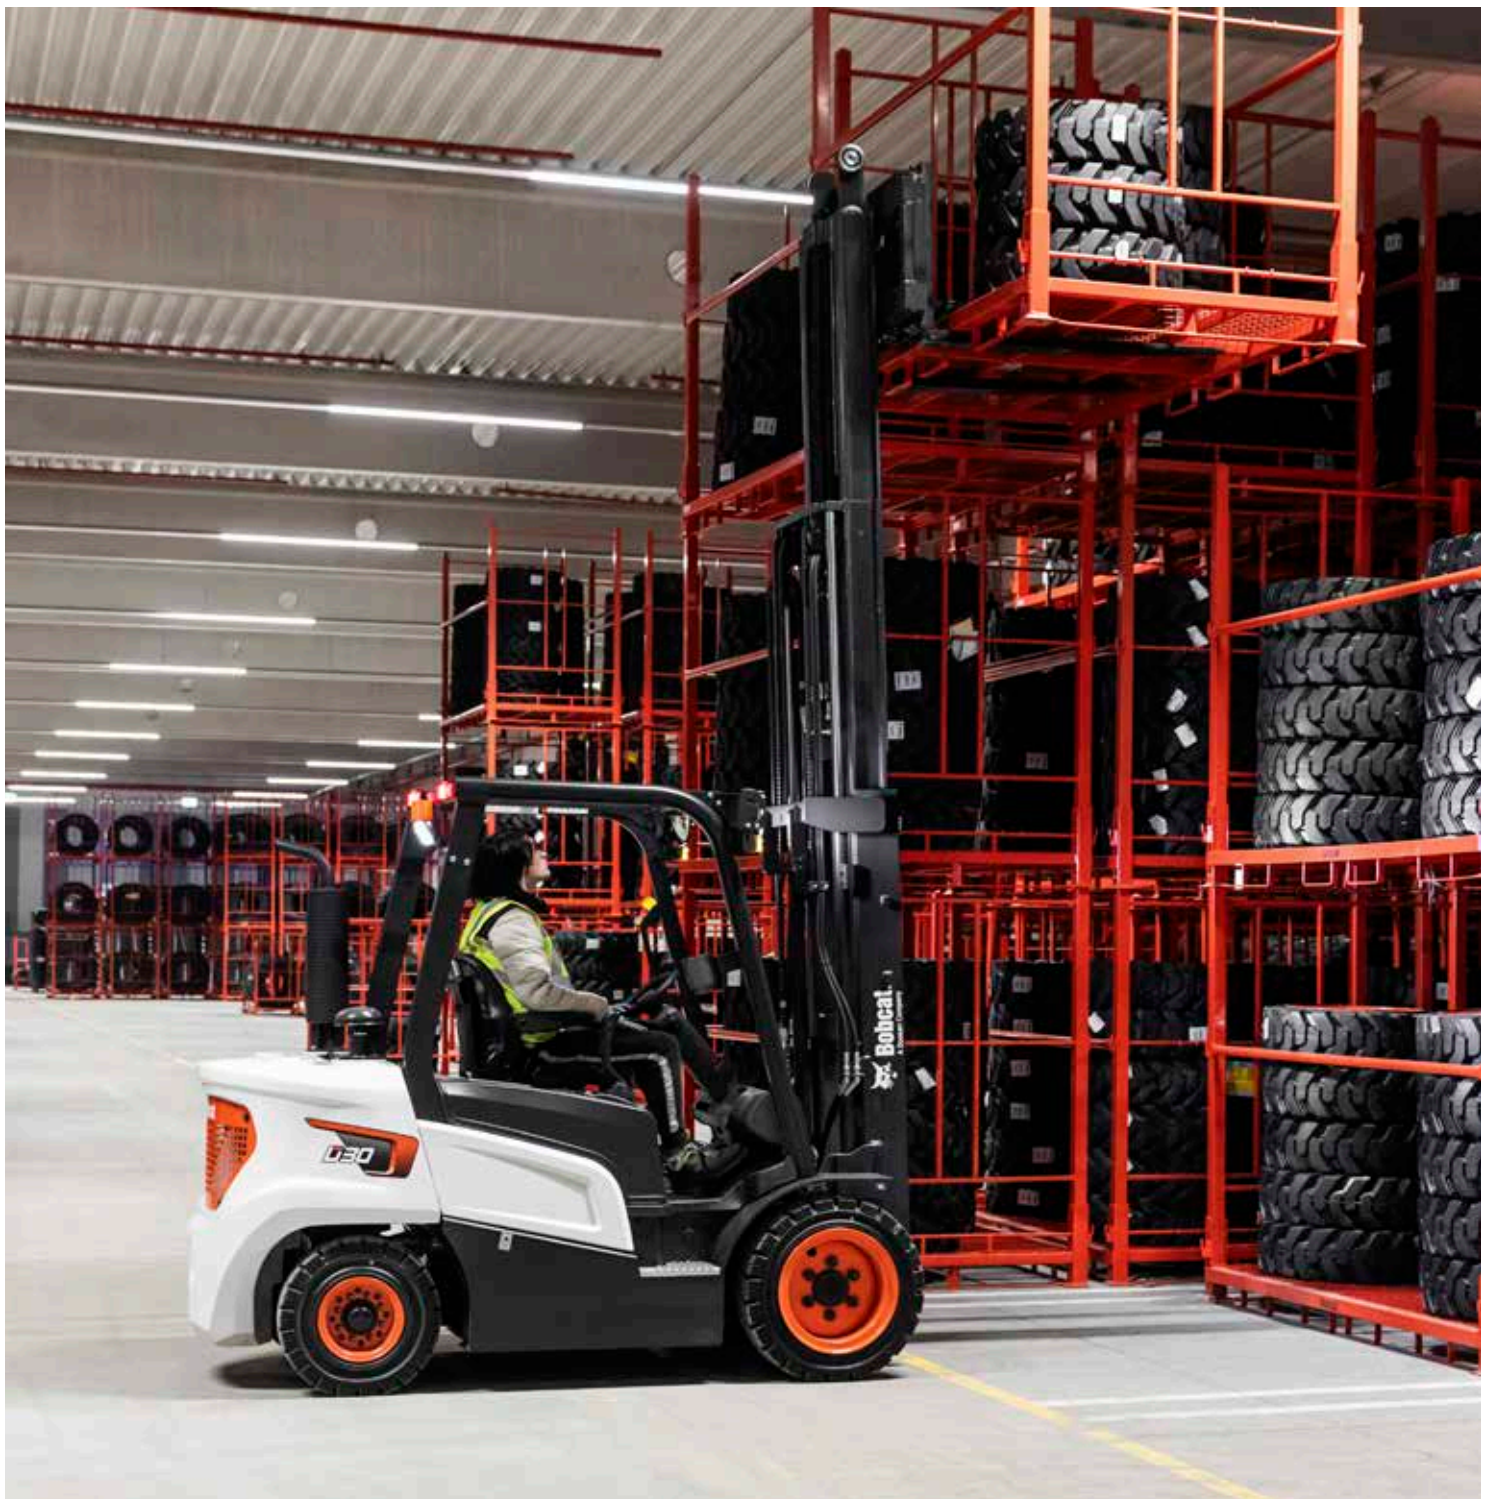

ONE TOUGH ANIMAL

OUR MISSION

We empower operators to accomplish more, while working in the toughest conditions and tightest situations. When our customers have the will, we provide the way.

BOBCAT'S HISTORY

In 1958, Melroe Manufacturing Company introduced a compact front-end loader that evolved quickly into the M400, the world's first true skid steer loader. The company soon adopted what became the world-famous 'Bobcat' brand — and its success paved the way for the global compact equipment industry we see today.



YEARS OF EXPERIENCE

In 2021, Bobcat furthered its reach by acquiring Doosan Industrial Vehicle, increasing its capacity to provide customers with comprehensive business solutions. With Doosan's expertise in material handling and warehouse equipment dating back to its inaugural forklift in 1968, the company has established a global presence, with 400 dealers across 93 countries.



BOBCAT TODAY

Now, with a diversified portfolio that includes forklifts and warehouse equipment, Bobcat serves as a one-stop solution for intralogistics needs, from loading shipping containers to optimizing warehouse operations. Made according to the highest manufacturing standards, Bobcat's material handling machines offer the precision and durability customers expect.



MAST SPECIFICATIONS & RATED CAPACITIES

D30NXS															
MAST TYPE	MAXIMUM FORK HEIGHT (H3)	HEIGHT MAST LOWERED (H1)	HEIGHT MAST EXTENDED (H4)	FREE LIFT (H2)	TILT ANGLE (α/β)						LOAD CAPACITY (Q)				
					WITH LOAD BACKREST	WITH LOAD BACKREST	SINGLE PNEU.		DOUBLE PNEU.		SINGLE SOLID		SINGLE PNEU.	DOUBLE PNEU.	SINGLE SOLID
							FWD	BWD	FWD	BWD	FWD	BWD			
							LC 500 mm								
mm	mm	mm	mm	deg	deg	deg	deg	deg	deg	kg	kg	kg			
STD	2 030	1 580	3 280	152	6	10	6	10	6	10	3 000	3 000	3 000		
	2 950	2 040	4 200	152	6	10	6	10	6	10	3 000	3 000	3 000		
	3 230	2 180	4 480	152	6	10	6	10	6	10	3 000	3 000	3 000		
	3 500	2 430	4 755	152	6	10	6	10	6	10	3 000	3 000	3 000		
	3 800	2 580	5 055	152	6	10	6	10	6	10	3 000	3 000	3 000		
	3 950	2 655	5 205	152	6	10	6	10	6	10	3 000	3 000	3 000		
	4 350	2 855	5 605	152	6	8	6	10	6	10	3 000	3 000	3 000		
	4 500	2 930	5 755	152	6	5	6	10	6	10	3 000	3 000	3 000		
	4 960	3 155	6 205	152	6	3	6	10	6	10	2 750	3 000	3 000		
	FF	2 950	2 040	4 200	840	6	10	6	10	6	10	3 000	3 000	3 000	
3 230		2 180	4 480	980	6	10	6	10	6	10	3 000	3 000	3 000		
3 600		2 430	4 855	1 230	6	10	6	10	6	10	3 000	3 000	3 000		
FFT	2 950	1 590	4 210	390	6	8	6	8	6	8	3 000	3 000	3 000		
	3 900	1 905	5 155	705	6	8	6	8	6	8	3 000	3 000	3 000		
	4 240	2 015	5 485	815	6	8	6	8	6	8	3 000	3 000	3 000		
	4 290	2 040	5 560	840	6	8	6	8	6	8	3 000	3 000	3 000		
	4 730	2 180	5 980	980	6	8	6	8	6	8	3 000	3 000	3 000		
	4 805	2 205	6 055	1 005	6	8	6	8	6	8	3 000	3 000	3 000		
	4 930	2 280	6 180	1 080	6	5	6	8	6	8	2 650	3 000	3 000		
	5 110	2 380	6 355	1 150	6	5	6	8	6	8	2 500	3 000	3 000		
	5 170	2 350	6 420	1 180	6	5	6	8	6	8	2 300	3 000	3 000		
	5 560	2 530	6 805	1 330	6	3	6	8	6	8	2 000	2 975	3 000		
	6 010	2 680	7 255	1 480	6	3	6	8	6	5	1 500	2 850	2 950		
	6 290	2 850	7 540	1 650	6	3	6	8	6	5	1 200	2 800	2 600		
	6 500	2 920	7 750	1 720	6	3	6	8	6	3	1 250	2 750	2 300		
	6 910	3 055	8 155	1 855	6	3	6	8	6	3	825	2 650	1 800		
	7 060	3 180	8 305	1 980	6	3	6	5	6	3	750	2 600	1 650		
	7 360	3 280	8 605	2 080	6	3	6	5	6	3	625	2 200	1 375		
	7 510	3 330	8 755	2 130	6	3	6	5	6	3	550	2 050	1 275		
	7 810	3 430	9 055	2 230	6	3	6	3	6	3	450	1 800	1 075		

Note: Mast specifications & rated capacities are based on standard chassis with dual pneumatic tire and without side shifter.

MAST SPECIFICATIONS & RATED CAPACITIES

D33NXS															
MAST TYPE	MAXIMUM FORK HEIGHT (H3)	HEIGHT MAST LOWERED (H1)	HEIGHT MAST EXTENDED (H4)	FREE LIFT (H2)	TILT ANGLE (α/β)						LOAD CAPACITY (Q)				
					WITH LOAD BACKREST	WITH LOAD BACKREST	SINGLE PNEU.		DOUBLE PNEU.		SINGLE SOLID		SINGLE PNEU.	DOUBLE PNEU.	SINGLE SOLID
							FWD	BWD	FWD	BWD	FWD	BWD			
							LC 500 mm								
mm	mm	mm	mm	deg	deg	deg	deg	deg	deg	kg	kg	kg			
STD	2 030	1 580	3 280	152	6	10	6	10	6	10	3 250	3 250	3 250		
	2 950	2 040	4 200	152	6	10	6	10	6	10	3 250	3 250	3 250		
	3 230	2 180	4 480	152	6	10	6	10	6	10	3 250	3 250	3 250		
	3 500	2 430	4 755	152	6	10	6	10	6	10	3 250	3 250	3 250		
	3 800	2 580	5 055	152	6	10	6	10	6	10	3 250	3 250	3 250		
	3 950	2 655	5 205	152	6	10	6	10	6	10	3 250	3 250	3 250		
	4 350	2 855	5 605	152	6	5	6	10	6	10	3 250	3 250	3 250		
	4 500	2 930	5 755	152	6	5	6	10	6	10	3 100	3 250	3 250		
	4 960	3 155	6 205	152	6	3	6	10	6	8	2 700	3 200	3 250		
	FF	2 950	2 040	4 200	840	6	10	6	10	6	10	3 250	3 250	3 250	
3 230		2 180	4 480	980	6	10	6	10	6	10	3 250	3 250	3 250		
3 600		2 430	4 855	1 230	6	10	6	10	6	10	3 250	3 250	3 250		
FFT	2 950	1 590	4 210	390	6	8	6	8	6	8	3 250	3 250	3 250		
	3 900	1 905	5 155	705	6	8	6	8	6	8	3 250	3 250	3 250		
	4 240	2 015	5 485	815	6	8	6	8	6	8	3 250	3 250	3 250		
	4 290	2 040	5 560	840	6	8	6	8	6	8	3 250	3 250	3 250		
	4 730	2 180	5 980	980	6	8	6	8	6	8	3 150	3 250	3 250		
	4 805	2 205	6 055	1 005	6	8	6	8	6	8	3 000	3 250	3 250		
	4 930	2 280	6 180	1 080	6	3	6	8	6	8	2 600	3 250	3 250		
	5 110	2 380	6 355	1 150	6	3	6	8	6	8	2 500	3 200	3 250		
	5 170	2 350	6 420	1 180	6	3	6	8	6	8	2 250	3 175	3 150		
	5 560	2 530	6 805	1 330	6	3	6	8	6	5	2 000	3 075	3 200		
	6 010	2 680	7 255	1 480	6	3	6	5	6	3	1 600	2 975	3 050		
	6 290	2 850	7 540	1 650	6	3	6	3	6	3	1 250	2 900	2 575		
	6 500	2 920	7 750	1 720	6	3	6	3	6	3	1 200	2 850	2 250		
	6 910	3 055	8 155	1 855	6	3	6	3	6	3	900	2 750	1 750		
	7 060	3 180	8 305	1 980	6	3	6	3	6	3	850	2 550	1 600		
	7 360	3 280	8 605	2 080	6	3	6	3	6	3	650	2 200	1 350		
	7 510	3 330	8 755	2 130	6	3	6	3	6	3	600	2 050	1 225		
	7 810	3 430	9 055	2 230	6	3	6	3	6	3	550	1 750	1 025		

Note: Mast specifications & rated capacities are based on standard chassis with dual pneumatic tire and without side shifter.

MAST SPECIFICATIONS & RATED CAPACITIES

D35NXS															
MAST TYPE	MAXIMUM FORK HEIGHT (H3)	HEIGHT MAST LOWERED (H1)	HEIGHT MAST EXTENDED (H4)	FREE LIFT (H2)	TILT ANGLE (α / β)						LOAD CAPACITY (Q)				
					WITH LOAD BACKREST	WITH LOAD BACKREST	SINGLE PNEU.		DOUBLE PNEU.		SINGLE SOLID		SINGLE PNEU.	DOUBLE PNEU.	SINGLE SOLID
			mm	mm	mm	mm	FWD	BWD	FWD	BWD	FWD	BWD	LC 500 mm		
			deg	deg	deg	deg	deg	deg	deg	deg	kg	kg	kg		
STD	1 800	1 580	3 050	152	6	10	6	10	6	10	3 500	3 500	3 500		
	2 350	1 855	3 600	152	6	10	6	10	6	10	3 500	3 500	3 500		
	2 720	2 040	3 970	152	6	10	6	10	6	10	3 500	3 500	3 500		
	3 000	2 180	4 250	152	6	10	6	10	6	10	3 500	3 500	3 500		
	3 495	2 430	4 750	152	6	10	6	10	6	10	3 500	3 500	3 500		
	3 655	2 580	4 905	152	6	10	6	10	6	10	3 500	3 500	3 500		
	3 805	2 655	5 055	152	6	10	6	10	6	10	3 500	3 500	3 500		
	4 205	2 855	5 455	152	6	8	6	10	6	10	3 500	3 425	3 500		
	4 805	3 155	6 055	152	6	3	6	10	6	8	3 250	3 250	3 350		
	5 300	3 555	6 555	151	6	3	6	10	6	5	2 500	3 125	3 225		
FFL	2 350	1 855	3 600	655	6	10	6	10	6	10	3 500	3 500	3 500		
	2 720	2 040	3 970	840	6	10	6	10	6	10	3 500	3 500	3 500		
	3 000	2 180	4 250	980	6	10	6	10	6	10	3 500	3 500	3 500		
	3 600	2 430	4 745	1 230	6	10	6	10	6	10	3 500	3 500	3 500		
FFT	3 555	1 905	4 805	705	6	8	6	8	6	8	3 400	3 500	3 400		
	3 960	2 040	5 210	840	6	8	6	8	6	8	3 400	3 400	3 400		
	4 380	2 180	5 630	980	6	5	6	8	6	8	3 400	3 400	3 400		
	4 580	2 280	5 830	1 080	6	3	6	8	6	8	3 350	3 350	3 400		
	4 820	2 350	6 070	1 150	6	3	6	8	6	8	3 250	3 275	3 325		
	5 205	2 530	6 455	1 330	6	3	6	8	6	5	2 800	3 225	3 225		
	5 655	2 680	6 905	1 480	6	3	6	5	6	3	2 200	3 125	3 125		
	6 150	2 920	7 400	1 720	6	3	6	3	6	3	1 600	2 900	2 700		
	6 555	3 055	7 805	1 855	6	3	6	3	6	3	1 200	2 825	2 050		
6 900	3 245	8 150	2 045	6	3	6	3	6	3	900	2 750	1 625			

Note: Mast specifications & rated capacities are based on standard chassis with dual pneumatic tire and without side shifter.



Küng Stapler AG
 CH-9536 Schwarzenbach
 +41 71 929 55 44 / kuengag.ch



Bobcat

DOOSAN

Bobcat is a Doosan Company. Doosan is a global leader in construction equipment, power & water solutions, engines, and engineering proudly serving customers and communities for more than a century. | Bobcat and the Bobcat logo are registered trademarks of Bobcat Company in the United States and various other countries. ©2024 Bobcat Company. All Rights Reserved.

*Financing options may vary by country and dealer. Always ask your dealer about currently available financing options. Terms and conditions may apply.

Doosan Bobcat EMEA, U Kodelky 1810, 263 12 Dobříš, Czech Republic